

NEW!
more on
reverse

Floor Box, Recessed Cover Kits for New Concrete

Low Voltage Ports, Six Conduit Hubs in Box • Cover Kits with Two Devices



NEW!



**5.5 inch
Concrete Floor Box**
Six Hubs, Multiple Slots for
Low Voltage Dividers



**PLATED
ZINC COVERS,
STEEL FLANGE**


**RECESSED
FLBC5570MB
Brass-plated**



**COVER BLANK
FLBC5570AB
Antique bronze-plated**



**IN USE
FLBC5570NL
Nickel-plated**

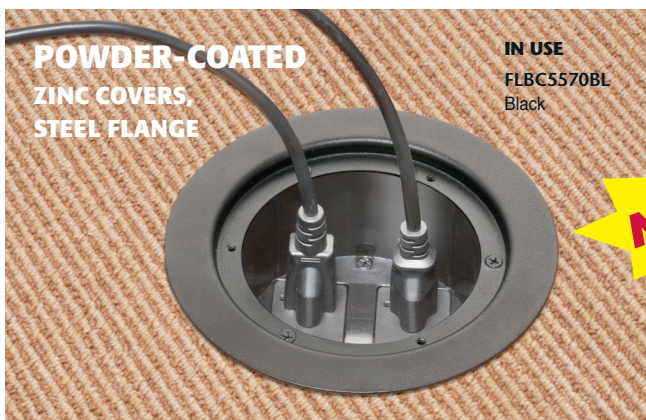

**POWDER-COATED
ZINC COVERS,
STEEL FLANGE**

**IN USE
FLBC5570BL
Black**

NEW!



**COVER BLANK
FLBC5570BR
Brown**



**RECESSED
FLBC5570LA
Light almond**

Here's the low cost, easy way to a flush, Listed installation of box and cover kit with TWO receptacles in a new concrete floor... Arlington's FLBC5500 FLOOR BOX and FLBC5570 series RECESSED COVER KITS.

Made of heavy-duty plastic, our new 5.5" non-metallic concrete floor box has six conduit hubs, four plugs and MULTIPLE options for positioning two low voltage dividers in the box (as needed).

Our FLBC5570 series recessed cover kits come with two installed receptacles, ultra thin stamped steel flange, and flush-to-the-floor in-use and blank covers. No low voltage outlets in these covers.

- Thin flange and recessed devices reduce tripping caused by protruding plugs
- TWO installed UL Listed 20A tamper-resistant decorator-style receptacles
- Diecast zinc cover, steel flange **PLATED** in brass, nickel, antique bronze **POWDER-COATED** in black, brown, light almond

FLBC5570 cover series components




Arlington®

1 Stauffer Industrial Park
Scranton, PA 18517
800/233.4717 • Fax 570/562.0646
www.aifittings.com

FLBC5570 Cover Kits, FLBC5500 Concrete Floor Box


Put TWO Receptacles in a New Concrete floor!

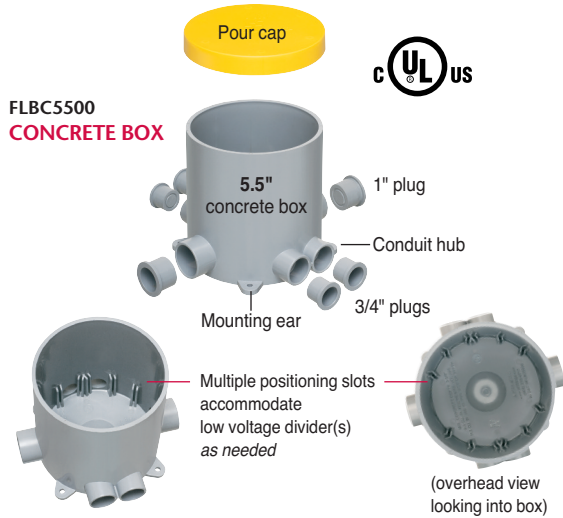

CATALOG NUMBER	UPC/DCI/NAED MFG. #018997	DESCRIPTION CONCRETE FLOOR BOX FOR NEW CONCRETE	UNIT PKG	STD PKG
FLBC5500	21190	5.5" Non-metallic Round Box with (6) Conduit Hubs cULus Listed. Includes pour cap, (4) 3/4" plugs and (2) 1" plugs for unused hubs.	1	5

EASY TO INSTALL

- 1 Set concrete floor box into position. Secure in place through molded mounting ears. **Option:** Use 1/4-20 screws to level/position box.
- 2 Install conduit as needed using PVC cement. Pull wires through conduit as required.
- 3 Install plugs (provided) with PVC cement to seal unused openings.
- 4 Install pour cap. Pour concrete to finished depth.
- 5 After concrete has cured, remove pour cap. Use saw to cut box to finished floor height.

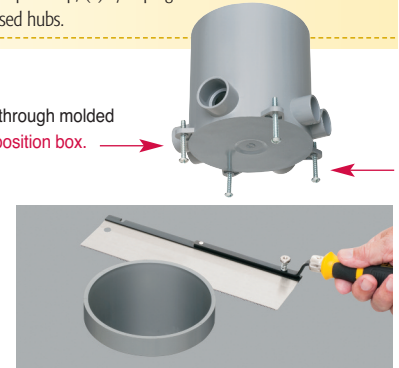

RECESSED COVER KITS for 5.5" CONCRETE BOX



Wire receptacles. Seal underside of flange with silicone sealant if desired (not included).



After installing flooring secure leveling ring assembly to floor with PVC cement applied around flange.

CATALOG NUMBER	UPC/DCI/NAED MFG. #018997	DESCRIPTION FINISH/COLOR	RECESSED COVER KITS WITH TWO INSTALLED RECEPTACLES	UNIT/STD PKG
with PLATED DIECAST ZINC BLANK COVER and IN-USE SLOTTED COVER • PLATED STEEL FLANGE				
FLBC5570MB	21176	Brass-plated cover and flange, Black Decorator Style Receptacles		1
FLBC5570NL	21177	Nickel-plated cover and flange, Black Decorator Style Receptacles		1
FLBC5570AB	21172	Antique Bronze-plated cover and flange, Black Decorator Style Receptacles		1

with PLATED COVER and FLANGE



Cover options Install gasket and blank with #8-32 x 5/8" screws or install in-use cover (no screws required).

CATALOG NUMBER	UPC/DCI/NAED MFG. #018997	DESCRIPTION FINISH/COLOR	RECESSED COVER KITS WITH TWO INSTALLED RECEPTACLES	UNIT/STD PKG
with POWDER-COATED DIECAST ZINC BLANK COVER and IN-USE SLOTTED COVER • POWDER-COATED STEEL FLANGE				
FLBC5570BL	21173	Black cover and flange, Black Decorator Style Receptacles		1
FLBC5570BR	21174	Brown cover and flange, Black Decorator Style Receptacles		1
FLBC5570LA	21175	Light Almond cover and flange, Black Decorator Style Receptacles		1

with POWDER-COATED COVER and FLANGE



Arlington®

1 Stauffer Industrial Park
Scranton, PA 18517
800/233.4717 • Fax 570/562.0646
www.aifittings.com

FLBC5570 KITS INCLUDE
Non-metallic leveling ring assembly with TWO installed UL Listed, tamper-resistant 20A decorator-style receptacles, blank cover with gasket, in-use slotted plug cover, (3) #8-32 x 5/8" flat head screws

Distributed by